


CB05	CB06
 <p>Material: Brushed Aluminium Size: <math>\varnothing 52\text{mm} \times \text{H}22\text{mm}</math> Hole Dimension: <math>\varnothing 45\text{mm}</math> Color: Silver Adjustable Angle: 26 degree up/down</p>	 <p>Material: Brushed Aluminium Size: <math>60\text{mm} \times 60\text{mm} \times \text{H}23\text{mm}</math> Hole Dimension: <math>\varnothing 50\text{mm}</math> Color: Silver Adjustable Angle: 26 degree up/down</p>

### Specification


Power consumption	Power Input	Lum@3000K	Flux@1M	CRI
1W	DC350mA	70-80lm	102lx	$\geq 90$

If input AC100-240V, need to add external LED driver (DL3501)



### Vertical&Horizontal Beamwidth Center Beam Lux

	24.2°	3000K 4000K 6000K			
0.3m		12.86cm	1231/1315LX	1442/1532LX	1645/1752LX
1.0m		42.88cm	108/102LX	130/138LX	235/245LX
1.5m		64.31cm	41/35LX	58/61LX	120/142LX
2.0m		85.75cm	26/29LX	32/35LX	61/73LX
3.0m		128.63cm	10/12LX	15/16LX	33/39LX

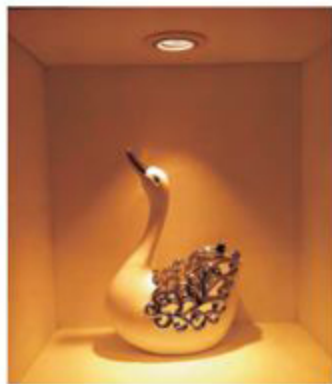

### Accessory

LED driver, cable and connector, please refer page 56,60

### Applications

Design for cabinet, showcase, shop area illumination