

Report No.:

Test Time: 2025/5/23 10:23:15

LUMINAIRE PHOTOMETRIC TEST REPORT

Luminaire Property

Manufacturer: 0
Luminaire Type: 4000K
Lamp Type:
Luminous Width: 0 mm
Luminous Length: 0 mm
Luminous Height: 0 mm


Voltage(V): 11.20 V
Current(A): 0.4880 A
Power(W): 4.02 W
Power Factor: 0.7320
Lamp Luminous Flux: 271.59

Photometric Results


CIE Class: Direct
Luminaire Luminous Flux: 271.5854 lm
Downward Ratio: 100.00%
Luminaire Efficacy Rating(LER): 67.56 lm/W
Beam Angle(50%) C0-180,C90-270: 79.0,92.5
Field Angle(10%) C0-180,C90-270: 144.4,150.2
S/MH C0-180,C90-270: 1.019,1.109

Max. Intensity: 133.24 cd
Max.Intensity Angle: C=135 Gamma=2
Upward Ratio: 0.00%
Efficacy: 100.00%
Center Intensity: 132.89 cd
Effective Luminous Flux: 263.71 lm
ERP(φ use)(120deg): 232.03 lm

Picture of Luminaire



Luminous Intensity Distribution Curve

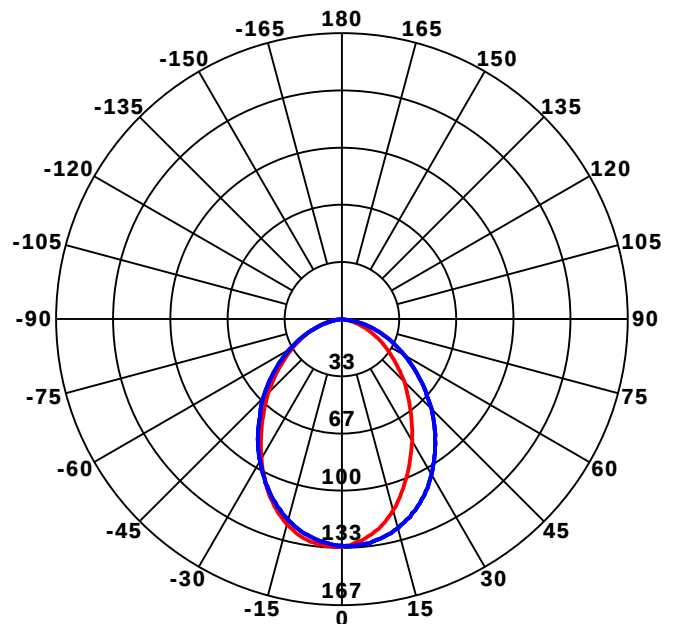

Beam Angle(50%) C0-180,C90-270: 79.0 deg,92.5 deg

C0-180 — C90-270 —



C Range: 0 - 360 Deg
C Interval: 45.0 Deg
Test Speed: High
Temperature: 25
Operators:
Test Date: 2025/5/23 10:23:15

G Range: 0 - 90 Deg
G Interval: 1.0 Deg
Test System: Huipu CPM-2000B Goniophotometer
Humidity: 65
Test Distance: 6.25 m
Remarks:

Report No.:

Test Time: 2025/5/23 10:23:15

Luminous Intensity Distribution Curve

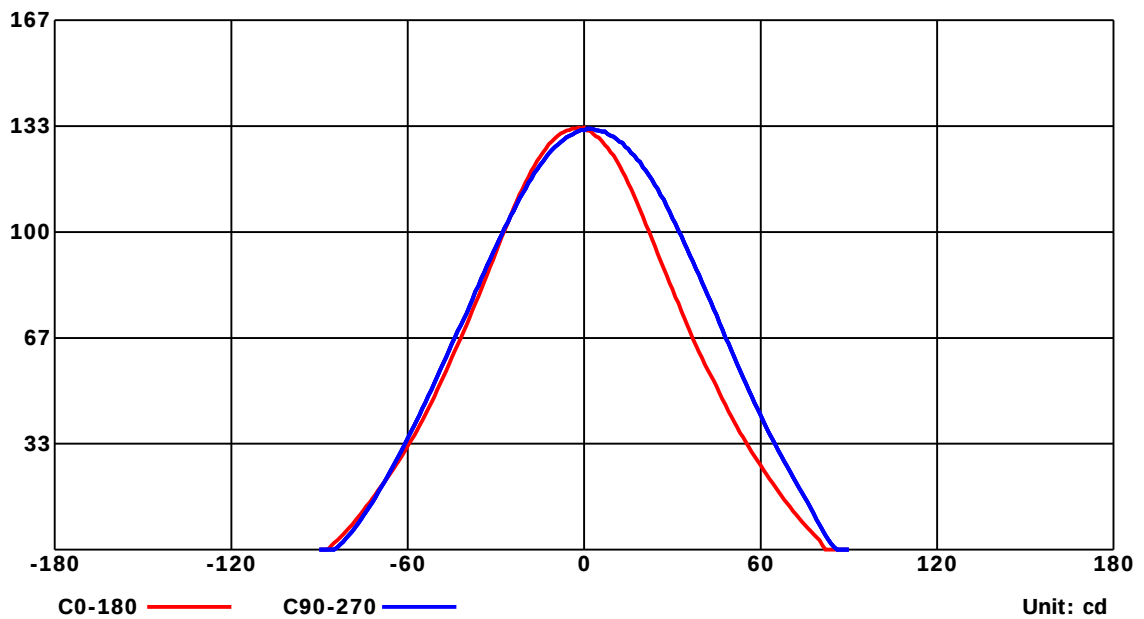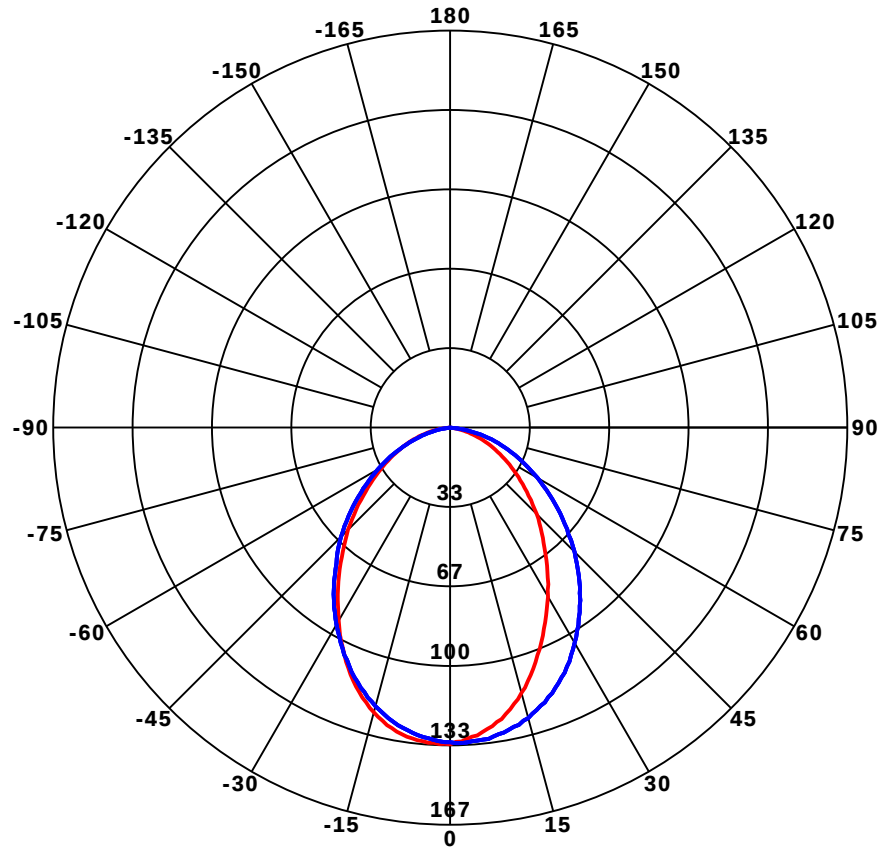

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature: 25

Operators:

Test Date: 2025/5/23 10:23:15

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-2000B Goniophotometer

Humidity: 65


Test Distance: 6.25 m

Remarks:

Report No.:

Test Time: 2025/5/23 10:23:15

Luminous Intensity Distribution Curve

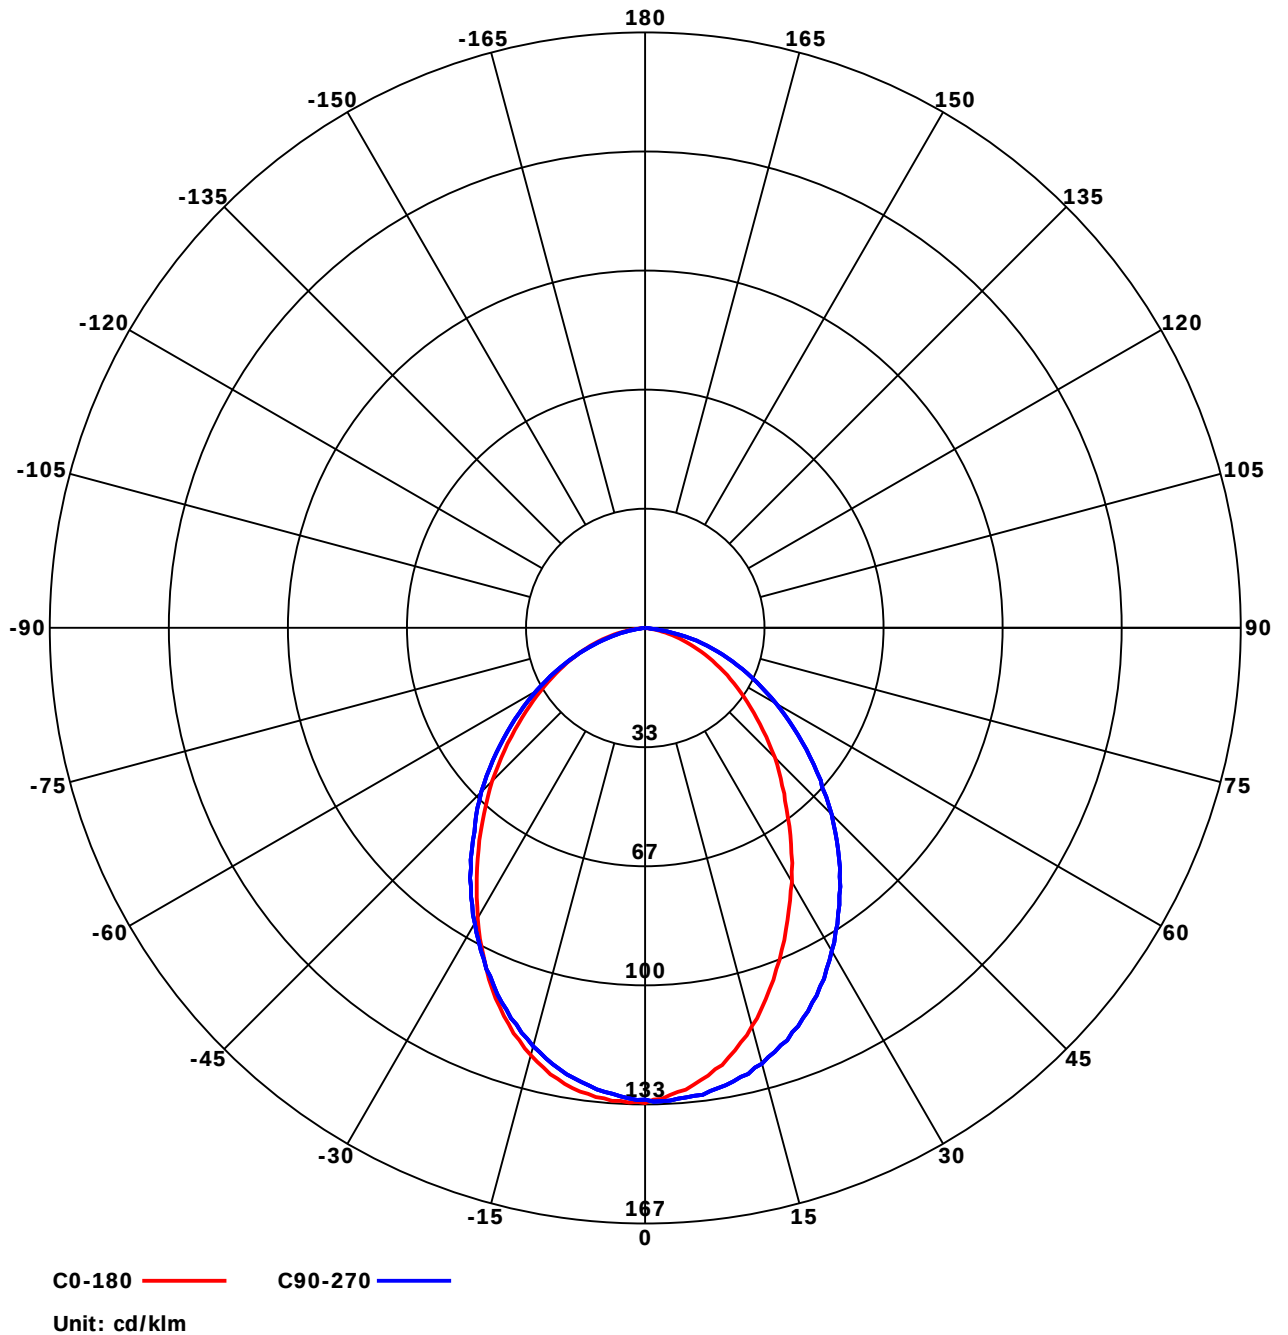

C Range: 0 - 360 Deg
C Interval: 45.0 Deg
Test Speed: High
Temperature: 25
Operators:
Test Date: 2025/5/23 10:23:15

G Range: 0 - 90 Deg
G Interval: 1.0 Deg
Test System: Huipu CPM-2000B Goniophotometer
Humidity: 65
Test Distance: 6.25 m
Remarks:


Report No.:

Test Time: 2025/5/23 10:23:15

UTILIZATION FACTORS TABLE

RHOCC	80			70			50			30			10			0
RHOW	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR	COEFFICIENTS OF UTILIZATION FOR RHOFC=20															
0	1.18	1.18	1.18	1.16	1.16	1.16	1.10	1.10	1.10	1.06	1.06	1.06	1.01	1.01	1.01	0.99
1	1.07	1.06	1.04	1.06	1.04	1.02	1.02	1.00	0.98	0.97	0.95	0.93	0.90	0.88	0.86	0.81
2	0.93	0.91	0.89	0.92	0.89	0.87	0.89	0.86	0.84	0.86	0.82	0.79	0.81	0.77	0.74	0.69
3	0.81	0.79	0.77	0.81	0.78	0.75	0.79	0.75	0.72	0.76	0.72	0.69	0.73	0.68	0.64	0.60
4	0.71	0.69	0.67	0.71	0.68	0.66	0.70	0.66	0.63	0.69	0.64	0.60	0.66	0.61	0.56	0.52
5	0.63	0.61	0.59	0.63	0.60	0.58	0.63	0.59	0.55	0.62	0.57	0.53	0.60	0.54	0.50	0.46
6	0.56	0.54	0.52	0.57	0.53	0.51	0.57	0.52	0.49	0.56	0.51	0.47	0.55	0.49	0.44	0.41
7	0.51	0.48	0.47	0.51	0.48	0.46	0.52	0.47	0.44	0.52	0.46	0.42	0.51	0.45	0.40	0.37
8	0.46	0.44	0.42	0.47	0.44	0.41	0.47	0.43	0.40	0.48	0.42	0.38	0.47	0.41	0.36	0.33
9	0.42	0.40	0.38	0.43	0.40	0.38	0.44	0.39	0.36	0.44	0.38	0.35	0.44	0.38	0.33	0.30
10	0.39	0.36	0.35	0.39	0.36	0.34	0.40	0.36	0.33	0.41	0.35	0.32	0.41	0.35	0.30	0.27

LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

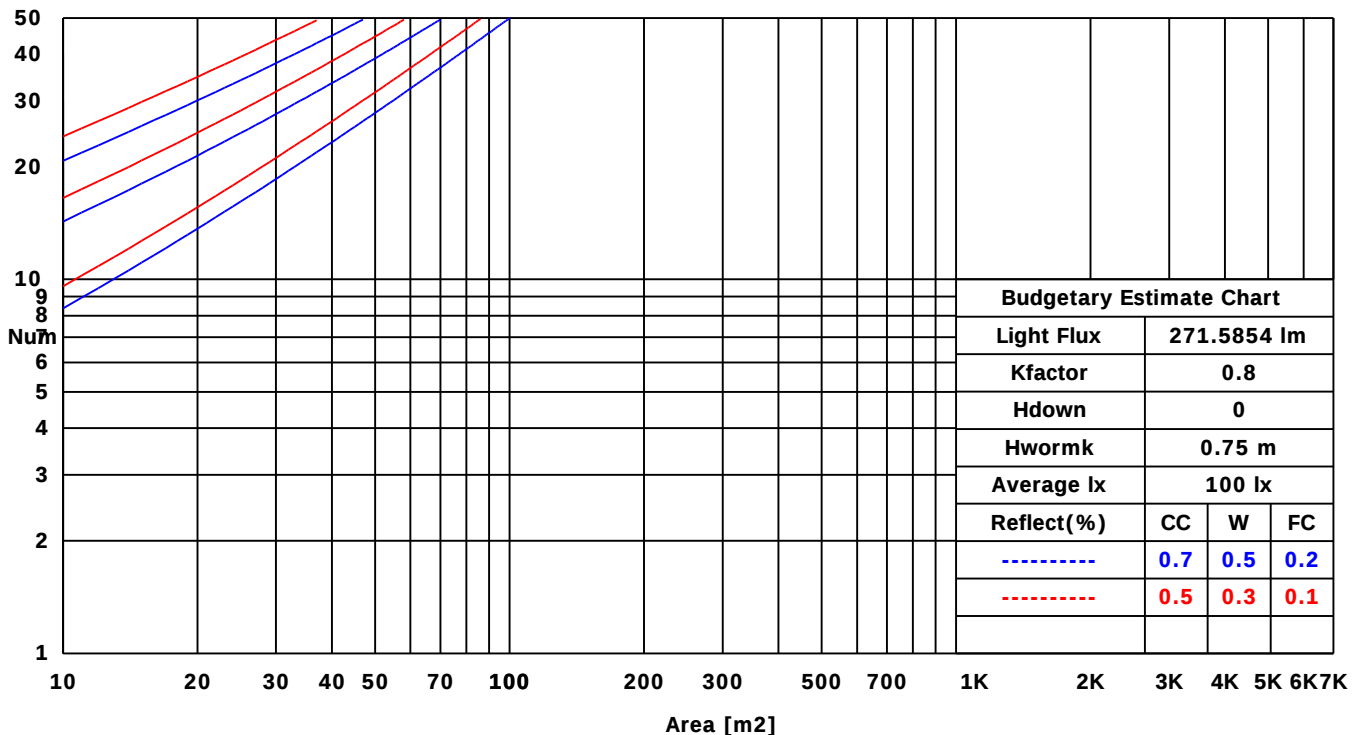

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature: 25

Operators:

Test Date: 2025/5/23 10:23:15

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-2000B Goniophotometer

Humidity: 65


Test Distance: 6.25 m

Remarks:

Report No.:

Test Time: 2025/5/23 10:23:15

ISOCANDELA DIAGRAM (RECTANGULAR)

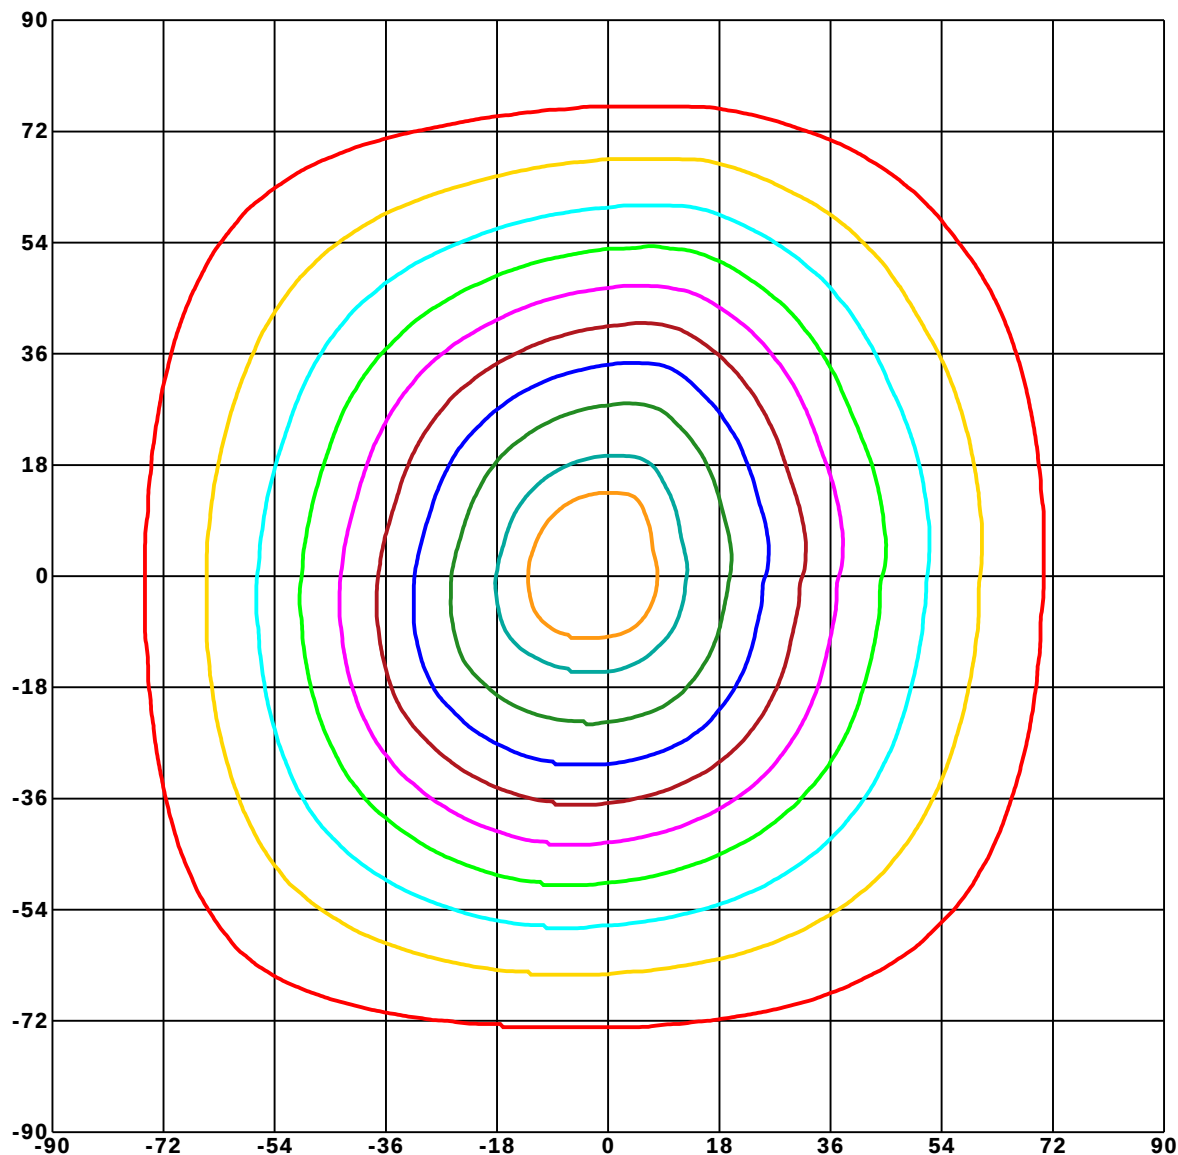

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature: 25

Operators:

Test Date: 2025/5/23 10:23:15

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-2000B Goniophotometer

Humidity: 65


Test Distance: 6.25 m

Remarks:

Report No.:

Test Time: 2025/5/23 10:23:15

ISOCANDELA DIAGRAM (SPHERE)

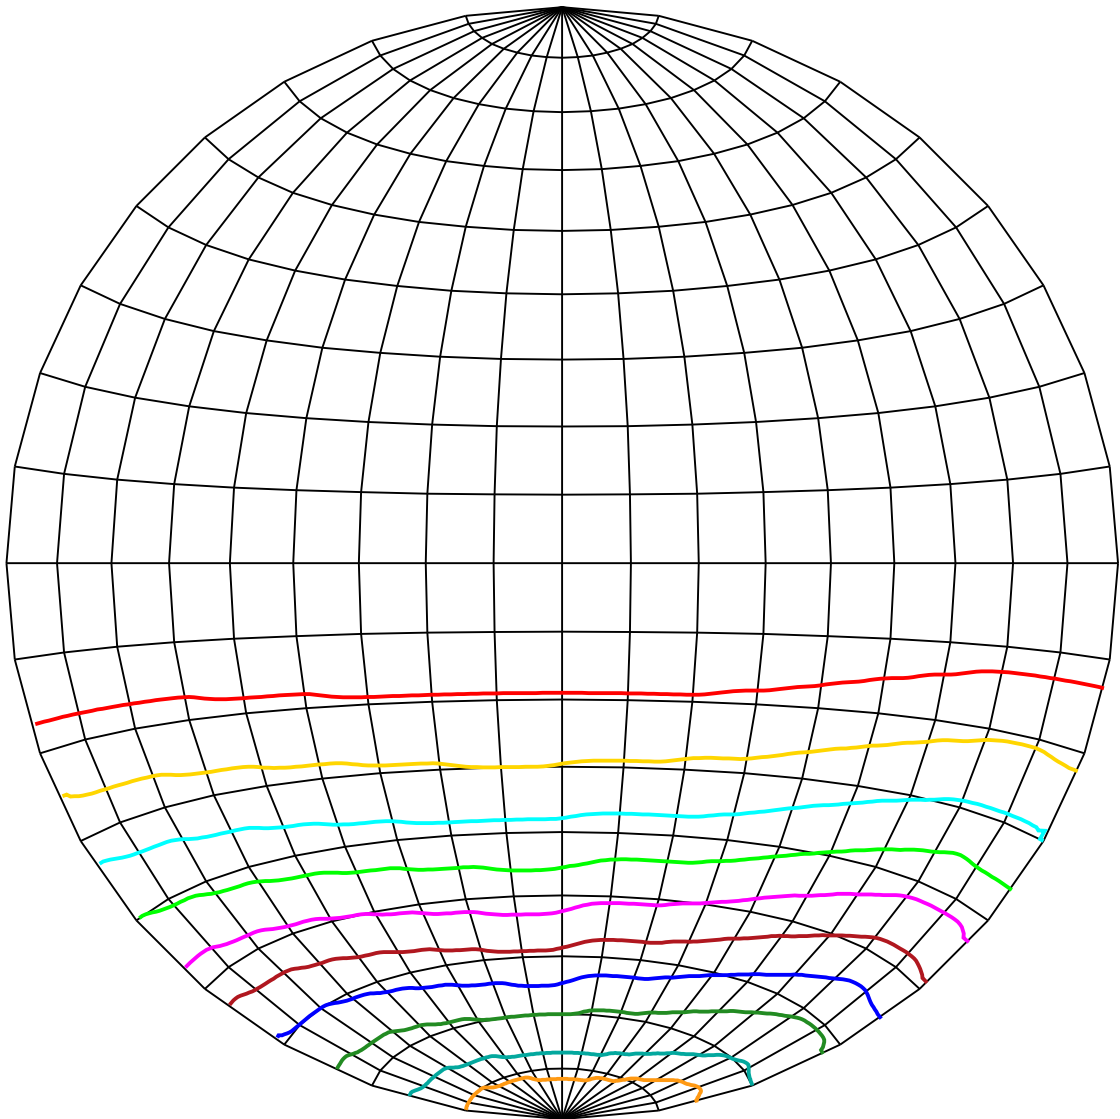

Unit of intensity:cd Imax(100%): 133.242 cd

— 66.621(50%Imax)
— 119.918(90%Imax)
— 39.973(30%Imax)
— 126.58(95%Imax)
— 26.648(20%Imax)

— 106.594(80%Imax)
— 53.297(40%Imax)
— 79.945(60%Imax)
— 93.27(70%Imax)
— 13.324(10%Imax)

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature: 25

Operators:

Test Date: 2025/5/23 10:23:15

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-2000B Goniophotometer

Humidity: 65


Test Distance: 6.25 m

Remarks:

Report No.:

Test Time: 2025/5/23 10:23:15

ISOLX DIAGRAM

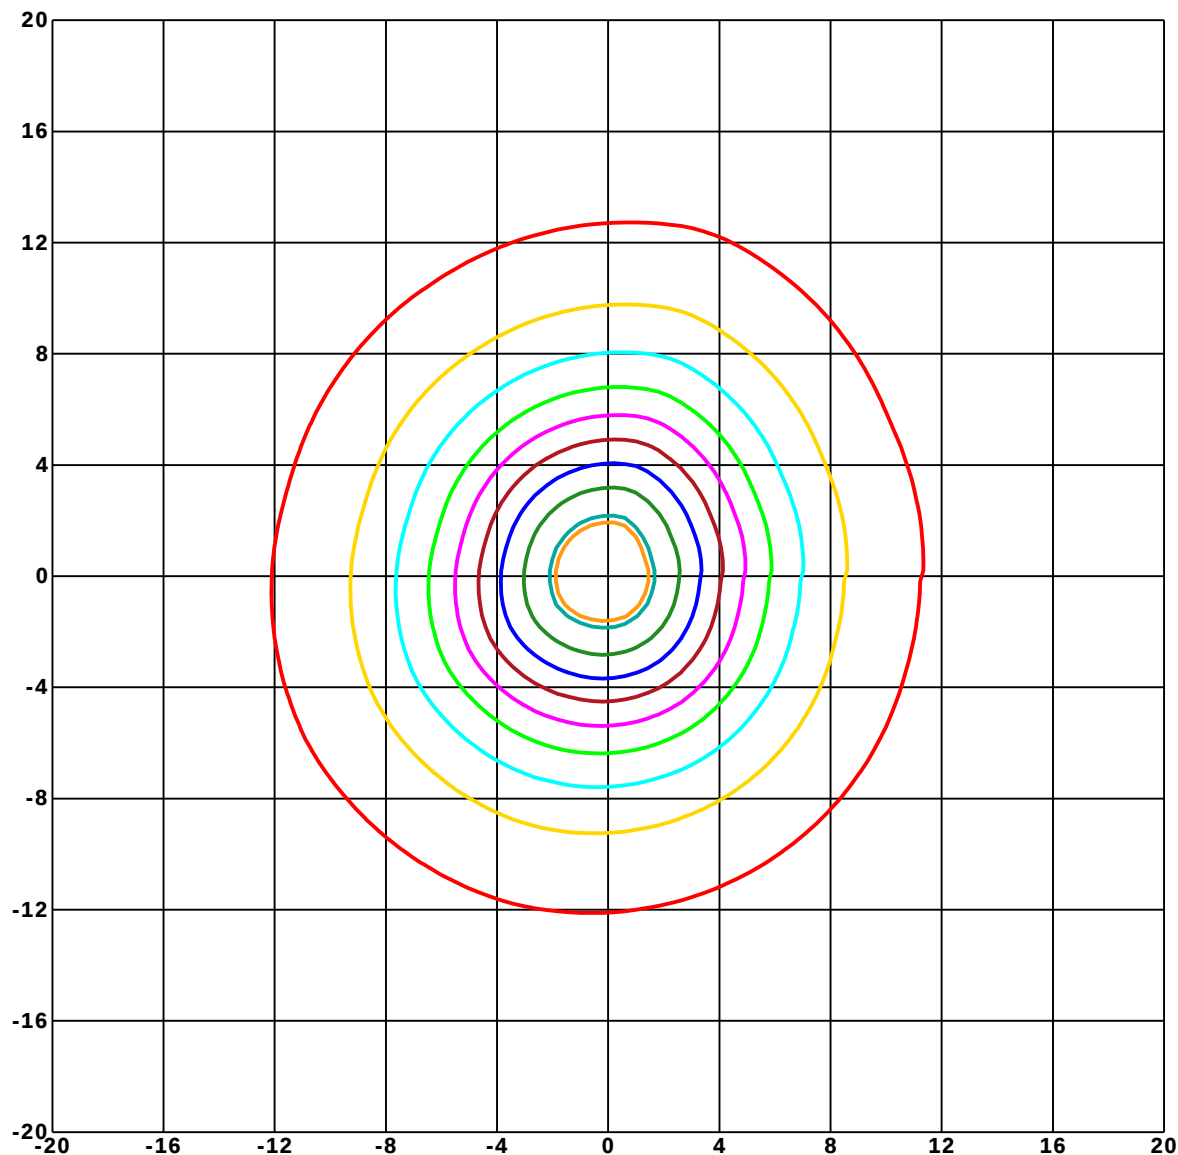

Unit of illumination:lx

Height of plane:10.0(m)/32.81(ft)

0.665(50%Emax)

1.064(80%Emax)

1.197(90%Emax)

0.532(40%Emax)

0.399(30%Emax)

0.798(60%Emax)

1.223(92%Emax)

0.931(70%Emax)

0.266(20%Emax)

0.133(10%Emax)

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature: 25

Operators:

Test Date: 2025/5/23 10:23:15

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-2000B Goniophotometer

Humidity: 65


Test Distance: 6.25 m

Remarks:

Report No.:

Test Time: 2025/5/23 10:23:15

UTILIZATION FACTOR DIAGRAM (ROAD)

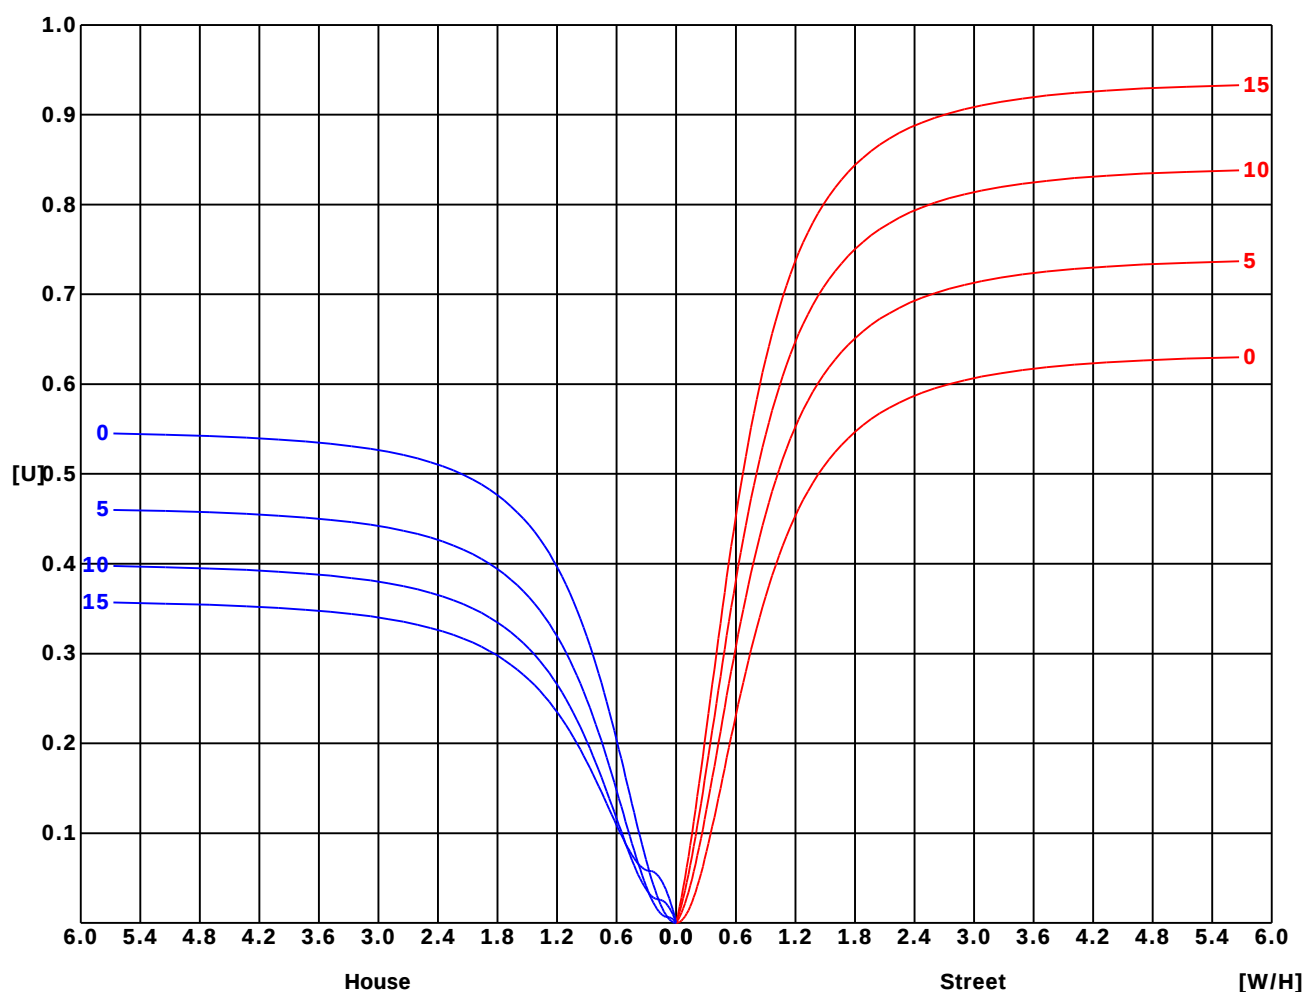

C Range: 0 - 360 Deg
C Interval: 45.0 Deg
Test Speed: High
Temperature: 25
Operators:
Test Date: 2025/5/23 10:23:15


G Range: 0 - 90 Deg
G Interval: 1.0 Deg
Test System: Huipu CPM-2000B Goniophotometer
Humidity: 65
Test Distance: 6.25 m
Remarks:

Report No.:

Test Time: 2025/5/23 10:23:15

BRIGHT LIMIT DIAGRAM

C/G	45	50	55	60	65	70	75	80	85
C0	1953	1771	1595	1430	1269	1074	826	427	0
C90	2315	2132	1951	1787	1634	1473	1272	973	235
Dazzle	Quality	Illuminance	---	---	---	---	---	---	---
1.15	A	2000	1000	500	<=300				
1.5	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.2	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300
---	---	a	b	c	d	e	f	g	h

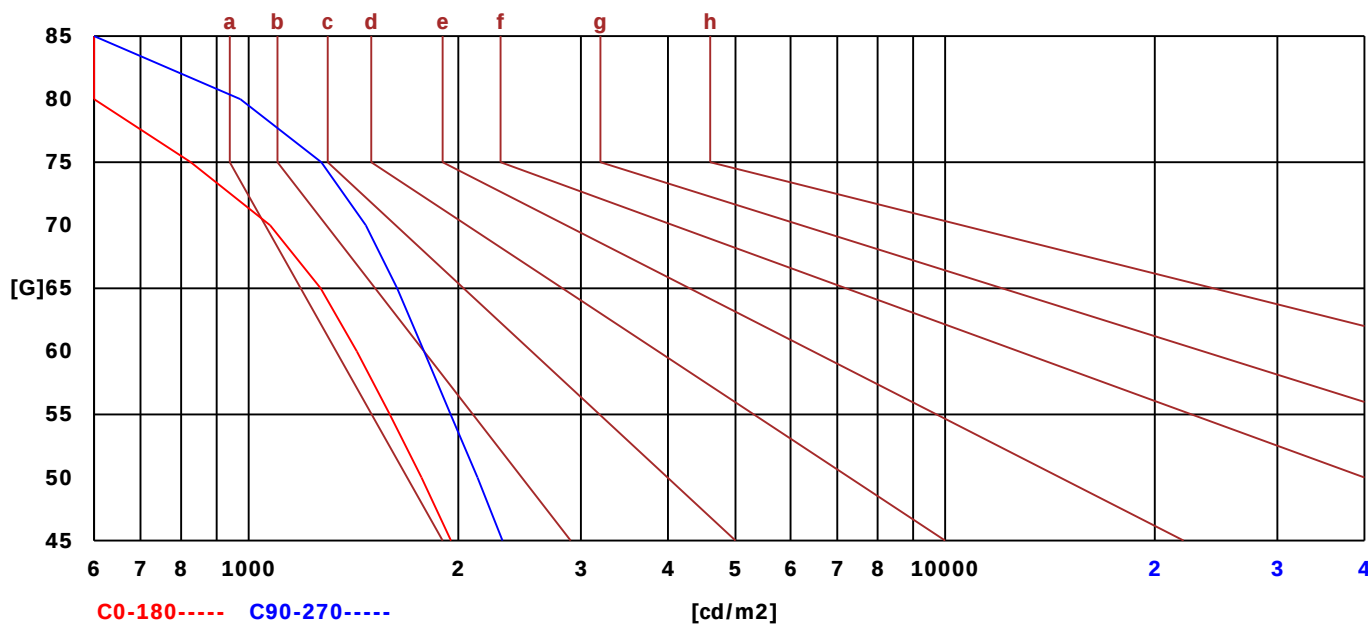

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature: 25

Operators:

Test Date: 2025/5/23 10:23:15

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-2000B Goniophotometer

Humidity: 65


Test Distance: 6.25 m

Remarks:

Report No.:

Test Time: 2025/5/23 10:23:15

LX-DISTANCE DIAGRAM

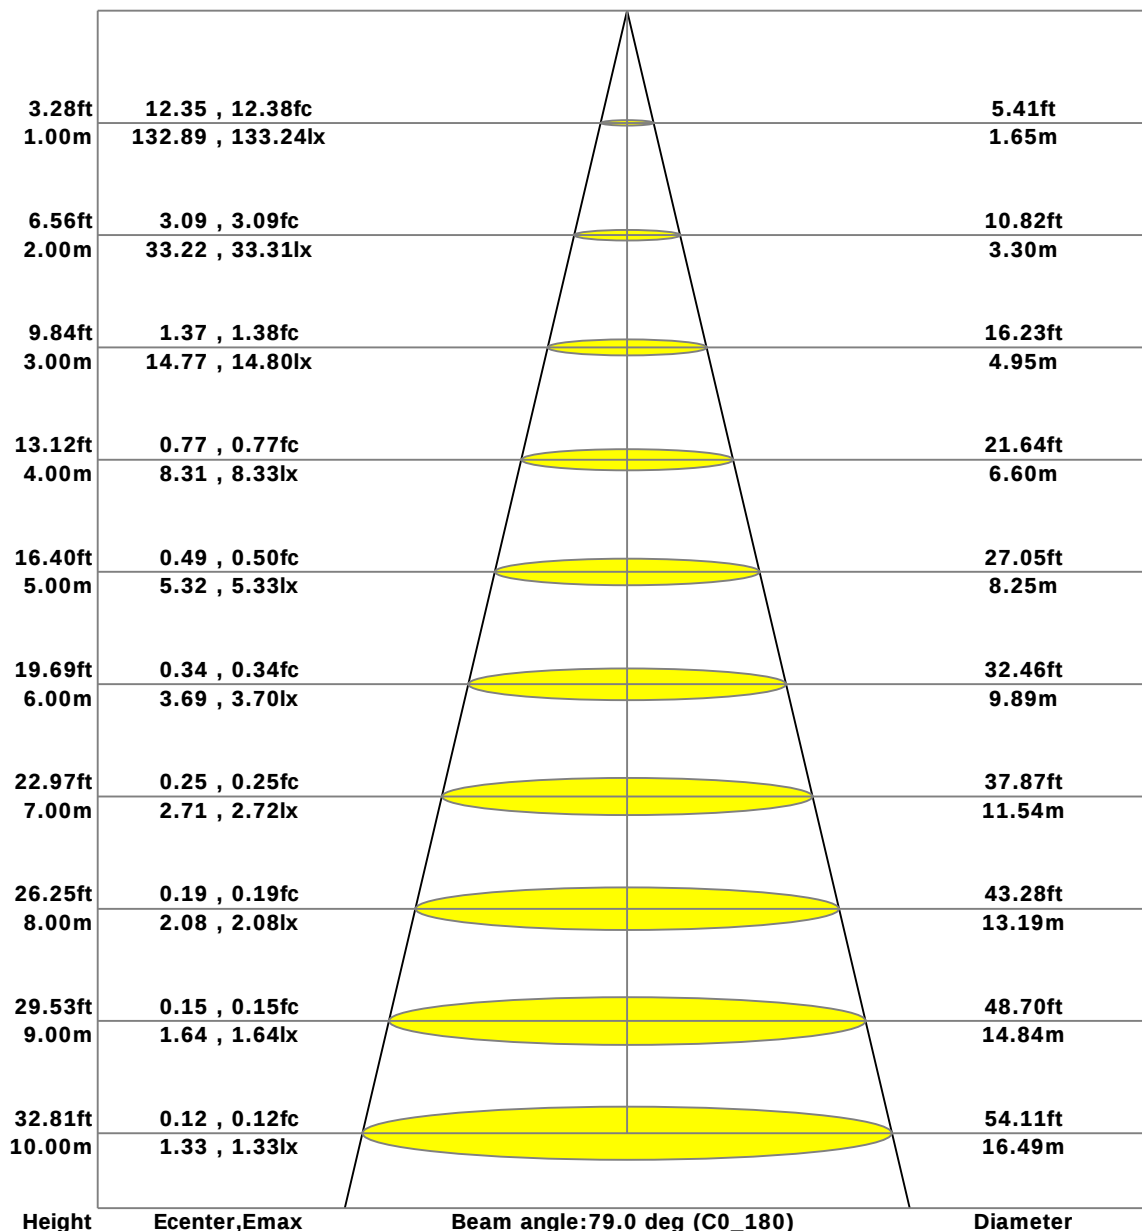

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature: 25

Operators:

Test Date: 2025/5/23 10:23:15

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-2000B Goniophotometer

Humidity: 65


Test Distance: 6.25 m

Remarks:

Report No.:

Test Time: 2025/5/23 10:23:15

BUG Class

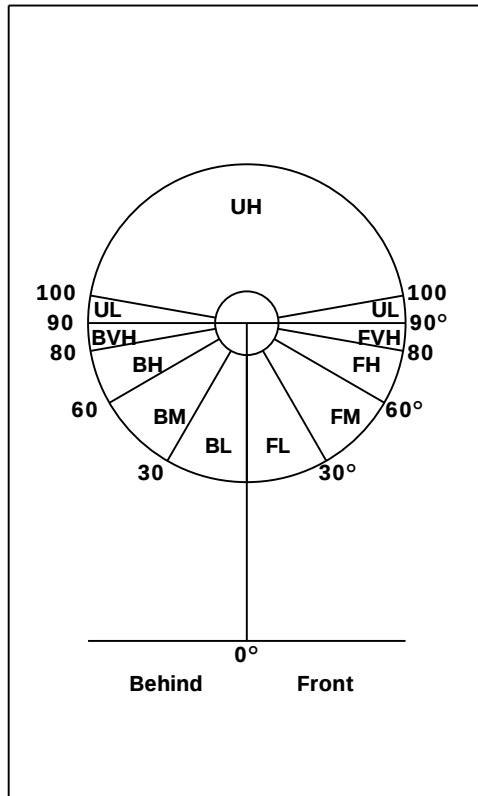

Zonal	Light Flux(lm)	Light Flux(%)
Front	136.9	50.4
FL (0°-30°)	47.5	17.5
FM (30°-60°)	69.4	25.5
FH (60°-90°)	19.3	7.1
FVH (90°-180°)	0.8	0.3

Behind	134.6	49.6
BL (0°-30°)	47.1	17.3
BM (30°-60°)	68.1	25.1
BH (60°-90°)	18.5	6.8
BVH (90°-180°)	0.9	0.3

Above	0.0	0.0
UL (90°-180°)	0.0	0.0
UH (180°-270°)	0.0	0.0

Limit Light	NA	NA
-------------	----	----

BUG Class(TM-15-07)	
Asymmetric Lighting Fixtures (Type I , II , III , IV)	B0 U0 G0
Symmetrical Lighting Fixtures (Type V , Area Light)	B0 U0 G0

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature: 25

Operators:

Test Date: 2025/5/23 10:23:15

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-2000B Goniophotometer

Humidity: 65


Test Distance: 6.25 m

Remarks:

Report No.:

Test Time: 2025/5/23 10:23:15

LCS 图

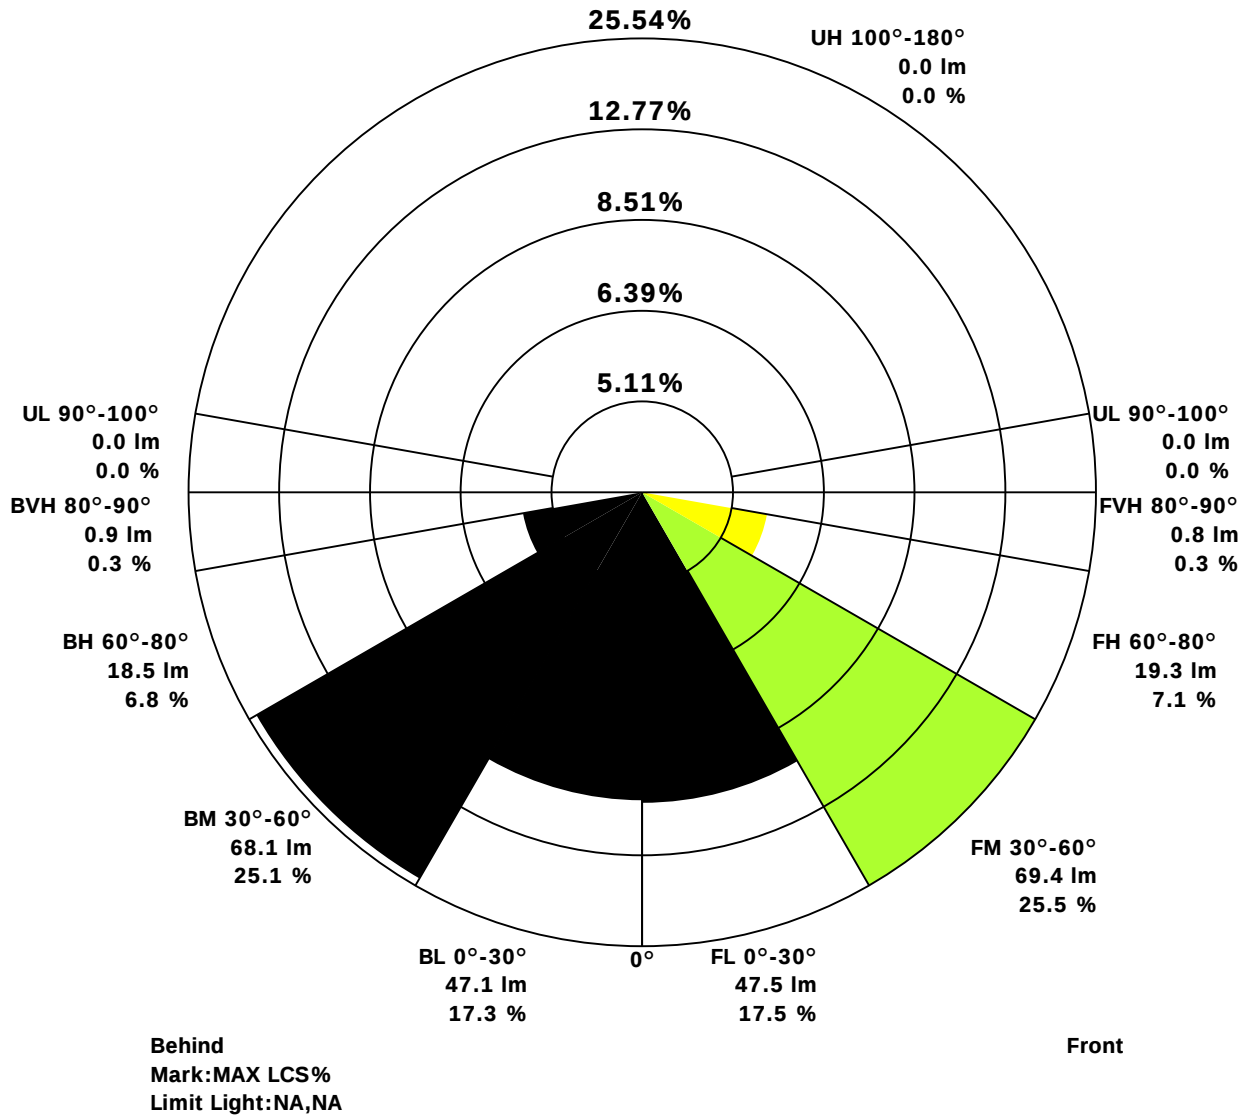

C Range: 0 - 360 Deg
C Interval: 45.0 Deg
Test Speed: High
Temperature: 25
Operators:
Test Date: 2025/5/23 10:23:15

G Range: 0 - 90 Deg
G Interval: 1.0 Deg
Test System: Huipu CPM-2000B Goniophotometer
Humidity: 65
Test Distance: 6.25 m
Remarks:

Report No.:

Test Time: 2025/5/23 10:23:15

UGR(Unified Glare Rating) TABLE

RHOCC		70	70	50	50	30	70	70	50	50	30
RHOW		50	30	50	30	30	50	30	50	30	30
RHOF		20	20	20	20	20	20	20	20	20	20
Room Size X Y		Viewed Endwise					Viewed Crosswise				
2H	2H	14.62	15.25	14.49	15.39	15.59	16.06	16.69	15.93	16.83	17.03
	3H	14.43	15.01	14.37	15.19	15.44	15.74	16.33	15.68	16.50	16.75
	4H	14.27	14.82	14.24	15.02	15.30	15.54	16.10	15.52	16.30	16.58
	6H	14.07	14.59	14.08	14.81	15.12	15.33	15.85	15.34	16.08	16.39
	8H	13.95	14.46	13.99	14.69	15.02	15.22	15.73	15.26	15.96	16.29
	12H	13.84	14.33	13.90	14.58	14.92	15.11	15.59	15.17	15.84	16.19
4H	2H	15.56	16.12	15.54	16.32	16.60	17.79	18.35	17.77	18.55	18.83
	3H	15.45	15.94	15.51	16.18	16.53	17.54	18.03	17.60	18.28	18.63
	4H	15.32	15.76	15.42	16.04	16.42	17.35	17.80	17.46	18.07	18.45
	6H	15.12	15.52	15.28	15.82	16.25	17.12	17.52	17.28	17.82	18.25
	8H	15.00	15.38	15.19	15.69	16.14	17.00	17.37	17.19	17.69	18.14
	12H	14.88	15.23	15.10	15.56	16.03	16.87	17.22	17.09	17.55	18.02
8H	4H	15.40	15.90	15.43	16.14	16.47	17.91	18.42	17.95	18.65	18.98
	6H	14.96	15.27	15.21	15.62	16.12	17.31	17.62	17.56	17.97	18.46
	8H	14.85	15.13	15.12	15.49	16.01	17.19	17.47	17.46	17.83	18.35
	12H	14.73	14.97	15.04	15.35	15.89	17.06	17.31	17.37	17.68	18.23
12H	4H	15.03	15.38	15.25	15.71	16.18	17.44	17.78	17.65	18.11	18.58
	6H	14.84	15.12	15.12	15.48	16.00	17.21	17.49	17.49	17.85	18.37

C Range: 0 - 360 Deg
C Interval: 45.0 Deg
Test Speed: High
Temperature: 25
Operators:
Test Date: 2025/5/23 10:23:15

G Range: 0 - 90 Deg
G Interval: 1.0 Deg
Test System: Huipu CPM-2000B Goniophotometer
Humidity: 65
Test Distance: 6.25 m
Remarks:

G Range: 0 - 90 Deg
G Interval: 1.0 Deg
Test System: Huipu CPM-2000B Goniophotometer
Humidity: 65
Test Distance: 6.25 m
Remarks:

Report No.:

Test Time: 2025/5/23 10:23:15

ZONAL LUMINOUS FLUX TABLE-2

Y	C0	C45	C90	C135	C180	C225	C270	C315	Y	φ zonal	φ total	%lum	%lamp
10	124.1	124.5	129.9	129.8	129.5	129.3	126.7	125.5	10	12.4	12.4	4.6	4.6
20	104.7	108.3	120.2	118.4	115.5	118.4	113.6	111.0	20	34.1	46.5	17.1	17.1
30	82.0	87.1	104.3	98.7	93.7	100.4	95.4	90.7	30	48.0	94.5	34.8	34.8
40	60.5	65.3	84.3	76.3	70.7	77.7	74.3	68.8	40	51.9	146.5	53.9	53.9
50	41.9	45.5	62.7	54.8	50.3	55.9	54.4	48.1	50	47.7	194.2	71.5	71.5
60	26.5	28.6	42.2	35.7	32.6	37.1	35.0	30.9	60	37.8	232.0	85.4	85.4
70	13.4	14.7	24.5	20.2	18.8	21.1	18.1	16.2	70	25.5	257.5	94.8	94.8
80	3.0	3.0	7.8	6.8	6.8	8.0	4.6	4.5	80	12.4	269.9	99.4	99.4
90	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	90	1.7	271.6	100.0	100.0

Conical surface Flux(90deg) : 171.3 lm

%lum = 63.1%

%lamp = 63.1%

Conical surface Flux(120deg) : 232.0 lm


%lum = 85.4%

%lamp = 85.4%

Report No.:

Test Time: 2025/5/23 10:23:15

SPACE ISOLX DIAGRAM

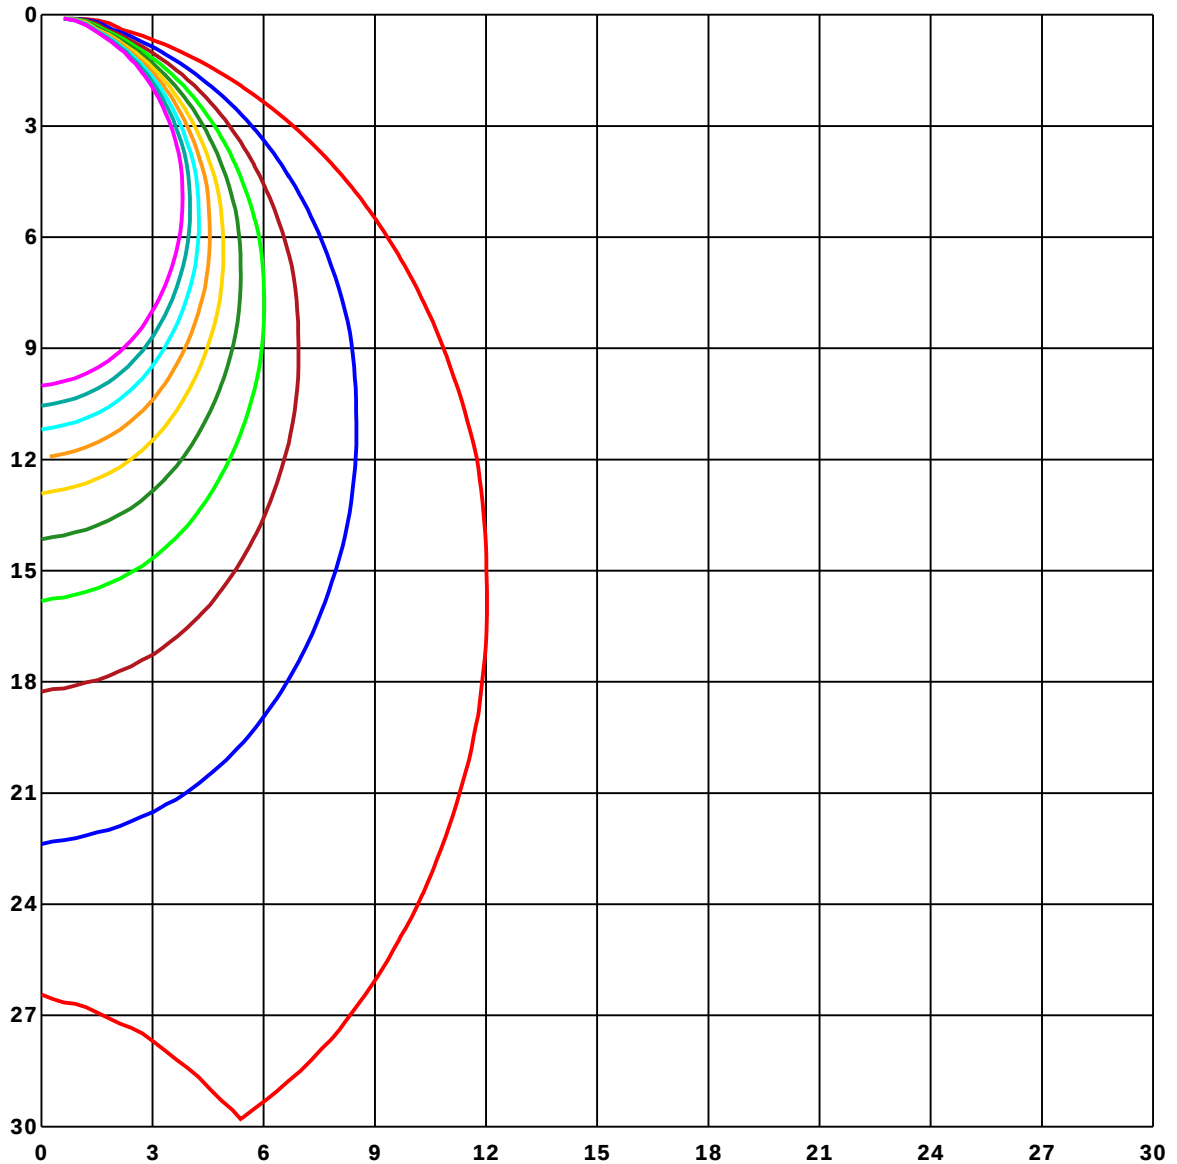

Unit of illumination:lx

1.328
1.195
1.062
0.929
0.797

0.664
0.531
0.398
0.266
0.133

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature: 25

Operators:

Test Date: 2025/5/23 10:23:15

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-2000B Goniophotometer

Humidity: 65

Test Distance: 6.25 m

Remarks:

Report No.:

Test Time: 2025/5/23 10:23:15

LUMINOUS DISTRIBUTION INTENSITY DATA

Gamma/C	C0	C45	C90	C135	C180	C225	C270	C315	C360	
G0	132.89	131.72	131.91	132.54	132.89	131.72	131.91	132.54	132.89	
G1	131.88	131.29	132.42	132.73	132.58	131.88	131.99	132.46	131.88	
G2	131.8	131.09	132.42	133.24	132.77	132.11	131.6	132.38	131.8	
G3	130.86	130.35	132.3	133.2	132.42	132.11	131.21	131.48	130.86	
G4	130.04	130.08	131.91	132.7	132.58	132.11	130.59	130.7	130.04	
G5	129.65	129.38	131.8	132.54	132.03	131.56	130.27	130.35	129.65	
G6	128.48	128.28	131.56	132.11	131.88	131.45	129.73	129.22	128.48	
G7	127.34	127.38	131.52	131.99	131.29	131.17	128.95	128.59	127.34	
G8	126.45	126.6	130.74	131.29	130.94	130.47	128.2	127.54	126.45	
G9	124.96	125.23	130.23	130.59	130.23	129.8	127.42	126.84	124.96	
G10	124.1	124.45	129.88	129.8	129.45	129.34	126.72	125.47	124.1	
G11	122.34	122.7	129.14	128.95	128.44	128.71	125.7	124.49	122.34	
G12	120.78	121.76	128.36	128.16	127.62	128.09	124.65	123.44	120.78	
G13	118.91	120.04	127.97	127.23	126.21	126.64	123.48	121.99	118.91	
G14	117.38	118.67	126.72	126.17	125.04	125.74	122.19	120.27	117.38	
G15	115.23	117.11	126.13	125.35	123.63	124.73	121.05	118.98	115.23	
G16	113.55	115.86	124.8	123.91	122.27	123.75	119.53	117.34	113.55	
G17	111.21	113.79	123.98	122.62	120.55	122.03	118.4	115.74	111.21	
G18	109.1	112.11	122.7	121.56	119.18	121.21	116.6	114.1	109.1	
G19	106.88	110.39	121.99	119.92	117.19	119.41	115.43	112.81	106.88	
G20	104.73	108.32	120.23	118.4	115.51	118.4	113.55	111.02	104.73	
G21	102.19	106.37	119.3	116.84	113.52	116.88	112.11	109.18	102.19	
G22	100.16	104.53	117.73	115.12	111.72	115.63	110.43	107.3	100.16	
G23	97.77	102.3	116.41	113.44	109.53	113.91	108.55	105.51	97.77	
G24	95.55	100.23	114.69	111.52	107.5	112.15	106.6	103.48	95.55	
G25	93.09	98.09	113.48	109.57	105.12	110.23	105.2	101.33	93.09	
G26	90.86	95.86	111.52	107.38	102.85	108.48	103.01	99.38	90.86	
G27	88.48	93.48	110.16	105.51	100.55	106.41	101.29	97.3	88.48	
G28	86.29	91.64	108.05	103.48	98.48	104.65	99.22	95.08	86.29	
G29	83.95	89.14	106.33	101.13	96.05	102.27	97.42	93.09	83.95	
G30	82.03	87.11	104.3	98.71	93.67	100.39	95.39	90.7	82.03	
G31	79.49	84.45	102.62	96.95	91.21	97.93	93.55	88.59	79.49	
G32	77.58	82.5	100.35	94.34	88.91	96.21	91.29	86.29	77.58	
G33	75.04	80.23	98.67	92.27	86.56	93.67	89.49	84.3	75.04	
G34	72.89	78.2	96.45	89.84	84.34	91.6	87.19	81.8	72.89	
G35	70.74	76.09	94.61	87.85	82.03	89.26	85.43	79.61	70.74	
G36	68.59	73.67	92.42	85.43	79.73	87.19	82.97	77.42	68.59	

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature: 25

Operators:

Test Date: 2025/5/23 10:23:15

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-2000B Goniophotometer

Humidity: 65

Test Distance: 6.25 m

Remarks:

Report No.:

Test Time: 2025/5/23 10:23:15

LUMINOUS DISTRIBUTION INTENSITY DATA(Continue 1)

Gamma/C	C0	C45	C90	C135	C180	C225	C270	C315	C360	
G37	66.33	71.45	90.66	83.2	77.42	84.69	81.17	75.39	66.33	
G38	64.22	69.41	88.28	80.98	75.31	82.54	78.67	73.13	64.22	
G39	62.15	67.27	86.48	78.67	72.97	80.16	76.56	70.94	62.15	
G40	60.47	65.27	84.26	76.33	70.74	77.73	74.34	68.79	60.47	
G41	58.36	63.2	82.19	74.22	68.75	75.55	72.58	66.52	58.36	
G42	56.64	61.21	80.04	72.19	66.6	73.32	70.66	64.45	56.64	
G43	54.8	59.18	77.93	69.73	64.49	70.9	68.83	62.15	54.8	
G44	53.16	57.07	75.66	67.66	62.58	68.71	66.72	60.2	53.16	
G45	51.37	55.23	73.79	65.47	60.59	66.33	64.84	58.13	51.37	
G46	49.26	53.13	71.33	63.4	58.32	64.22	62.7	56.02	49.26	
G47	47.3	51.21	69.26	61.25	56.17	62.23	60.59	54.02	47.3	
G48	45.59	49.38	66.56	59.14	54.14	60.12	58.48	51.91	45.59	
G49	43.55	47.42	65.0	56.95	52.15	57.73	56.52	50.2	43.55	
G50	41.91	45.55	62.73	54.8	50.31	55.9	54.38	48.13	41.91	
G51	40.2	43.75	60.63	52.77	48.09	53.67	52.38	46.45	40.2	
G52	38.59	41.91	58.48	50.66	46.29	51.84	50.27	44.49	38.59	
G53	36.8	40.08	56.41	48.75	44.34	49.77	48.4	42.7	36.8	
G54	35.39	38.36	54.14	46.8	42.54	47.97	46.25	41.02	35.39	
G55	33.71	36.6	52.15	44.77	40.66	46.05	44.49	39.22	33.71	
G56	32.23	34.96	50.08	43.05	39.06	44.22	42.38	37.46	32.23	
G57	30.66	33.24	48.13	41.05	37.3	42.5	40.59	35.82	30.66	
G58	29.3	31.84	46.05	39.26	35.7	40.55	38.75	34.06	29.3	
G59	27.77	30.12	44.1	37.5	34.14	38.79	36.88	32.58	27.77	
G60	26.48	28.59	42.19	35.74	32.62	37.15	35.04	30.94	26.48	
G61	25.0	27.07	40.23	34.06	31.05	35.39	33.28	29.45	25.0	
G62	23.71	25.55	38.32	32.38	29.49	33.83	31.41	27.81	23.71	
G63	22.3	24.18	36.52	30.78	28.09	31.95	29.77	26.41	22.3	
G64	20.98	22.85	34.69	29.26	26.64	30.31	27.93	24.84	20.98	
G65	19.65	21.45	32.93	27.62	25.23	28.83	26.25	23.4	19.65	
G66	18.4	20.04	31.17	26.02	23.91	27.11	24.57	21.95	18.4	
G67	17.07	18.75	29.53	24.65	22.54	25.66	22.89	20.47	17.07	
G68	15.78	17.42	27.77	23.05	21.29	24.06	21.29	19.02	15.78	
G69	14.57	15.94	26.09	21.64	19.92	22.46	19.69	17.66	14.57	
G70	13.4	14.69	24.45	20.16	18.75	21.13	18.13	16.17	13.4	
G71	12.15	13.44	22.81	18.83	17.38	19.69	16.41	14.88	12.15	
G72	11.09	12.23	21.21	17.34	16.09	18.32	14.96	13.63	11.09	
G73	9.96	10.9	19.61	15.9	14.84	16.88	13.59	12.3	9.96	

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature: 25

Operators:

Test Date: 2025/5/23 10:23:15

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-2000B Goniophotometer

Humidity: 65

Test Distance: 6.25 m

Remarks:

Report No.:

Test Time: 2025/5/23 10:23:15

LUMINOUS DISTRIBUTION INTENSITY DATA(Continue 2)

[illegible]

C Range: 0 - 360 Deg

C Interval: 45.0 Deg

Test Speed: High

Temperature: 25

Operators:

Test Date: 2025/5/23 10:23:15

G Range: 0 - 90 Deg

G Interval: 1.0 Deg

Test System: Huipu CPM-2000B Goniophotometer

Humidity: 65

Test Distance: 6.25 m

Remarks: